


PARALLEL PORT INTERFACE CARD WIRING DIAGRAM C1G



NOTES:

1. All inputs and outputs are provided with pull-down resistors.
2. If you need to connect a device that outputs more than 5vdc, you can use a resistor to limit the current. Use the following resistor values:
 10 vdc - 1 MOhm
 12 vdc - 1.5 MOhm
 24 vdc - 3.9 MOhm.
 To use these resistor values your card must be powered with 5vdc. If you are powering your board with a different voltage unexpected results can happen, including damage of the board.
3. Pins -2-9 are not optoisolated.
4. Input pin 15 and output pin 16 are provided with high speed optoisolators

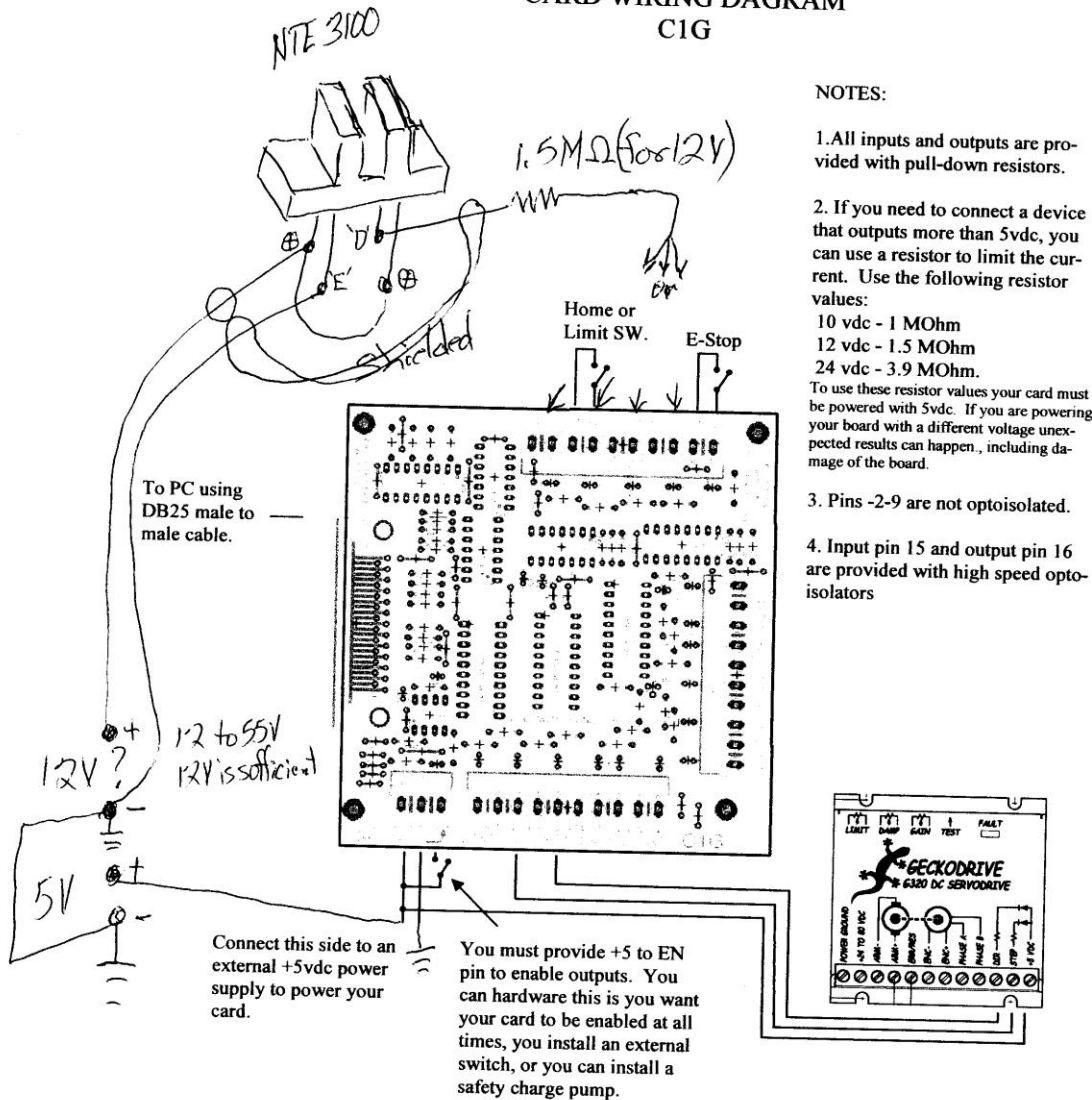

This card must be powered while your system is under power. Keep in mind noise can be transmitted into output signals that could trigger unwanted actions in your system.