


Sample NC probe and NO Touch plate "wire-Or" circuit (+5v to +30V at BoB)

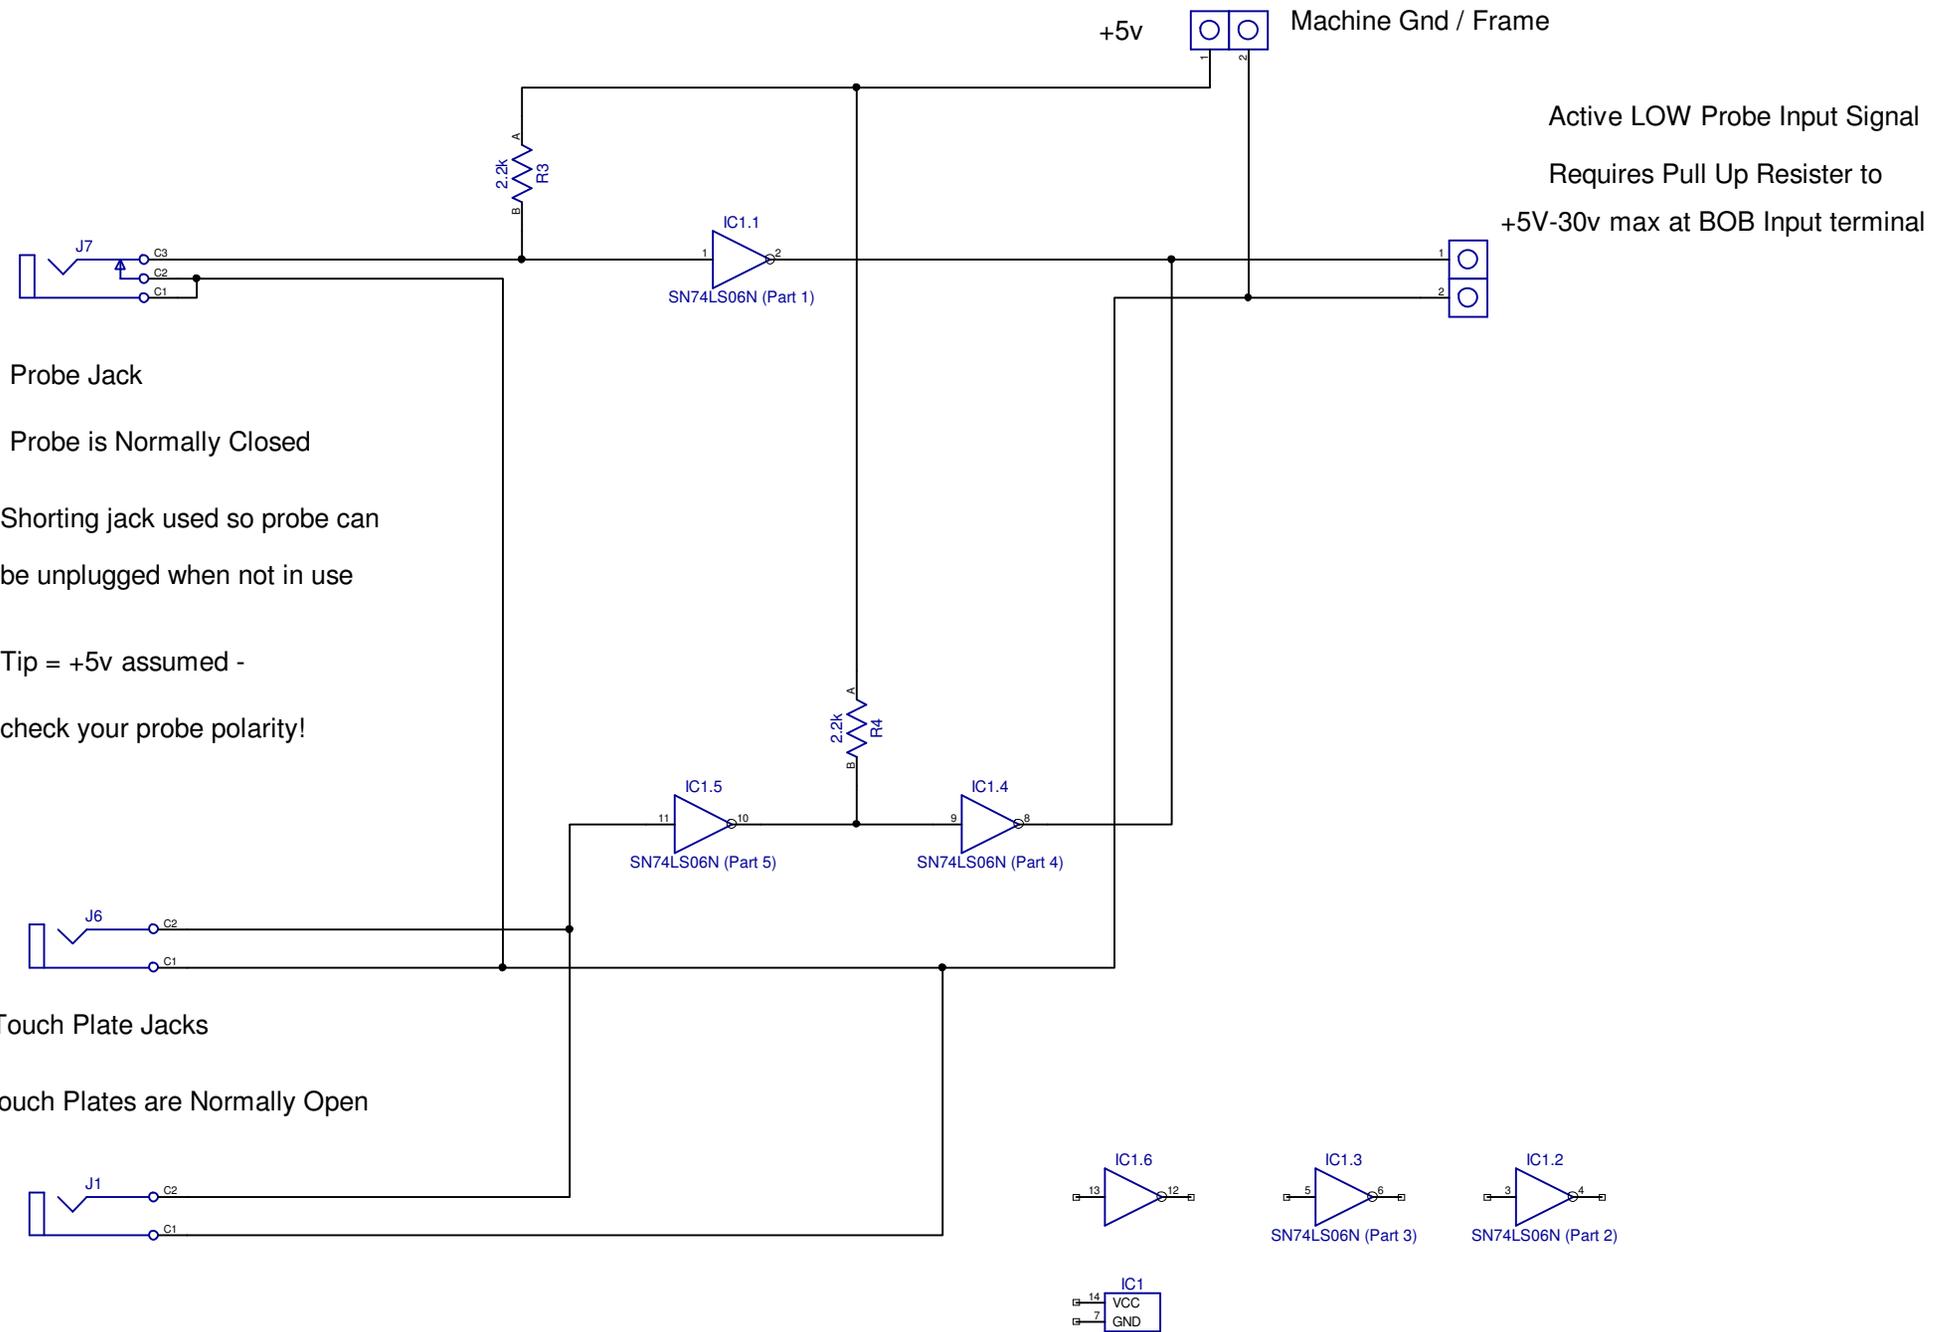

Probe Jack
 Probe is Normally Closed
 Shorting jack used so probe can be unplugged when not in use
 Tip = +5v assumed -
 check your probe polarity!

Touch Plate Jacks
 Touch Plates are Normally Open

Active LOW Probe Input Signal
 Requires Pull Up Resistor to +5V-30v max at BOB Input terminal