


## SPECIFICATIONS


|                       |                            |
|-----------------------|----------------------------|
| Standard              | NEMA 23                    |
| Step angle            | $1.8^{\circ} \pm 5\%$      |
| Current / Phase       | 3.0A                       |
| Voltage / Phase       | 3.9V                       |
| Phase No.             | 2                          |
| Resistance            | $1.3 \pm 10\% \Omega$      |
| Insulation resistance | 100M $\Omega$ hm (500V DC) |
| Inductance            | $6.5 \pm 20\%$ mH          |
| Insulation class      | B                          |
| Holding torque        | 30kgf.cm                   |

## DIAGRAM

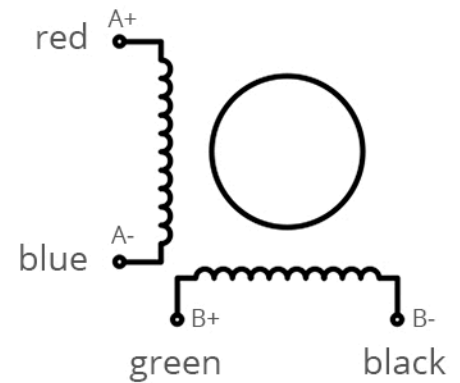

## DIMENSIONS

UNIT: mm

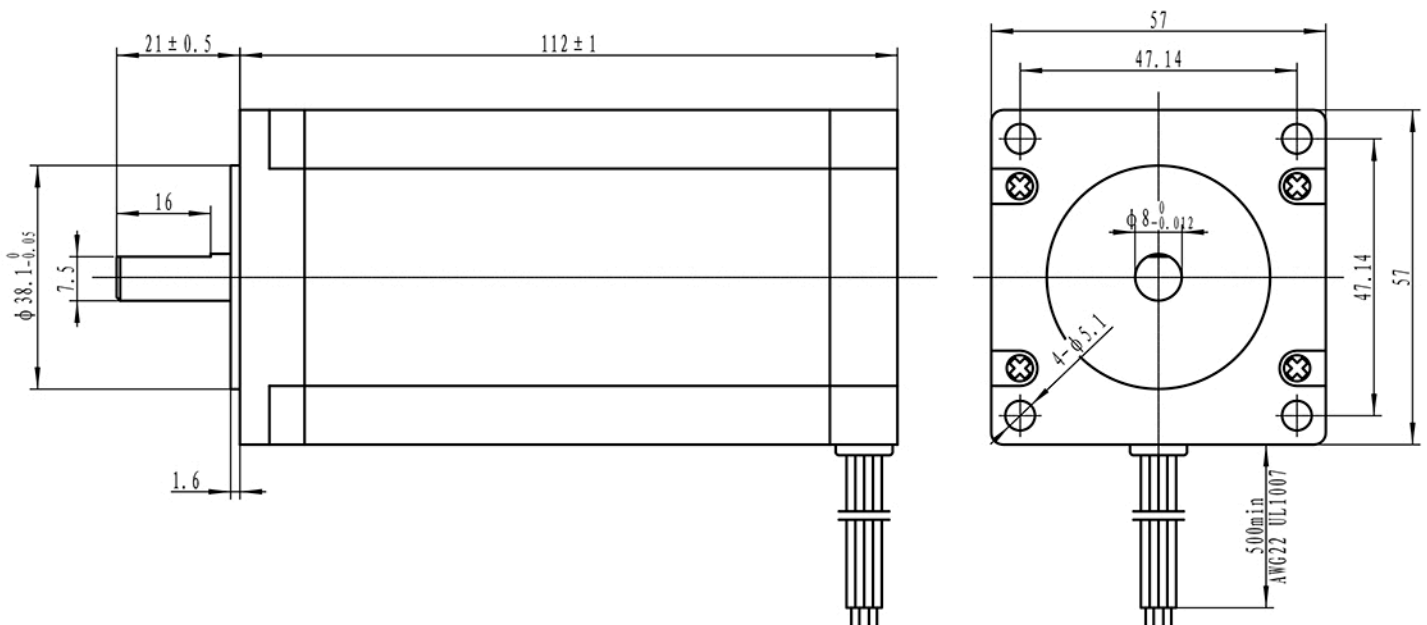



- NEMA 23 30 kgf.cm 3,0A
- WS23-0030-30-4

